

Installation manual for engine bay Mercedes-Benz SLK (R170), 2,3k

Years: 1996 - 2004

Engine type:

Engine bay and transmission elements skid plate has been designed and manufactured by LLC Metalloproduktsia. Product conforms to TOR 4591-001-25888788-2006 requirements. Product design is protected by model copyright certificates №89059, 15980, 15981, 15982, 15983. Patented in Russian Federation.

APPLICATION:

Protection of engine bay and transmission elements from mechanical deformation.

Тип кузова:

Protection of engine bay and transmission elements from dust and damp.

INSTALLATION:

Engine bay and transmission elements skid plate has been designed particularly for a certain vehicle. It should be mounted according to the producer's installation instruction by a dedicated dealer or on certified service stations. The skid plate is fixed to regular apertures located on vehicle's body load-bearing elements. In case of correct installation the skid plate should not interfere with any vehicle's units and components.

INSTALLATION MANUAL:

- 1. Disassemble skid plate into components.
- 2. Install the threaded inserts "1" in the holes of the radiator beam.
- 3. Install the front beam "B" to the mounted threaded inserts with the bolts M10x20.
- 4. Install the threaded inserts "2" in the front axle beam. Join the brackets "C" with them with bolts M10x20.
- 5. Install the skid plate "A" to the installed parts "B" and "C" with bolts M10x20 and washers.
- 6. Tighten all fastening points.

OPERATING CONDITIONS:

Engine bay and transmission elements skid plate has been designed to operate in conditions specified by vehicle's producer. Cases of crush or driving into obstacles at a speed should be excluded during exploitation. In case of head-on crush it is necessary to assure in absence of damages of vehicle's components and units and availability of roadworthiness on certified service stations.

WARRANTY:

Warranty period - 24 months.

WARRANTY TERMS:

The skid plate should be installed on a vehicle with undamaged body and load-bearing elements (vehicle, which hads never been involved in road traffic accident);

There are no mechanical damages of the skid plate resulting from head-on crush. All requirements to skid plate installation should be satisfied;


There are no mechanical damages of powder coating.

Producer does not bear liability for damages caused to the vehicle, health and life of people in case of installation and exploitation terms violation. Producer has a right to introduce changes into the skid plate construction.

ENVIRONMENTAL PROTECTION

Dispose of packaging properly. It is recommended to take it for recycling. Don't forget about environmental protection.



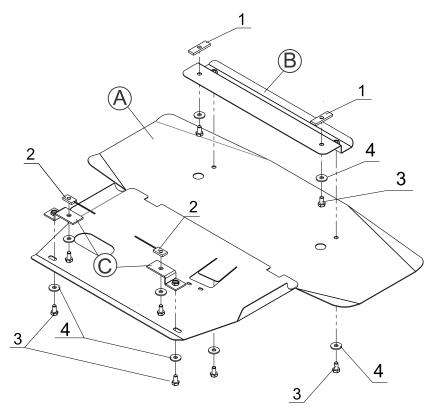

Article: 13.0526

LIST OF PARTS

| Nº | Name | QTY | View |
|----|-----------------|-----|------|
| 1 | Threaded insert | 2 | |
| 2 | Threaded insert | 2 | |
| 3 | Bolt M10x20 | 8 | |
| 4 | Washer 10 | 8 | 0 |

| Thread | M6x1.0 | M8x1.25 | M10x1.5 | M12x1.75 |
|-------------------|--------|---------|---------|----------|
| Tightening torque | 9.8 Nm | 24.0 Nm | 47.0 Nm | 81.0 Nm |